

SSP-T7



产品特点及应用范围:




- KHz 级频率范围
 - 频率准确度高
 - 体积小
 - 无铅环保产品
- 工业设备
 - 嵌入式设备
 - 物联网


产品性能

性能参数		SSP-T7
频率范围 (KHz)	F ₀	32.768
振动模式	Mode	基频
串联谐振电阻 (Ω)	R _r	65KΩ Max.
频率精度 (25°C 时)	F _{tol}	±20×10 ⁻⁶
温度系数	B	-0.04×10 ⁻⁶ /°C ²
工作温度范围	T _{OPR}	-40°C~+85°C
储存温度范围	T _{stg}	-55°C~+125°C
动电容	C ₁	1.9fF Typ.
静电容	C ₀	0.8pF Typ.
负载电容	CL	6.0pF 、 12.5pF
绝缘电阻	IR	>500MΩ DC/100V±10V
激励功率	DL	1 μW Max
老化率	F _{age}	±3×10 ⁻⁶ /年 Max.


外形尺寸(mm)




(侧视图)



(侧视图)



(顶视图)

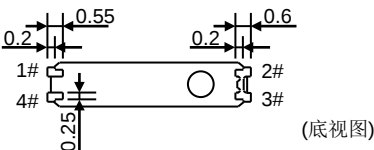

(底视图)

